



GALILEO.

Simply genius.




THE MOST EFFICIENT.

The pinnacle of aesthetic perfection with the integration of cooktop and hood in a single product for outstanding performance.




THE MOST EFFECTIVE.

With its clever fluid-dynamic design, Galileo stands out for its high collection capacity of up to 6.6 metres per second. Even the most persistent cooking vapours and smells are eliminated in just a few minutes.

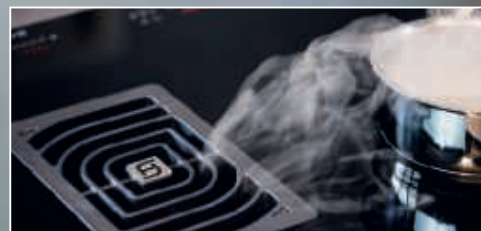

EASY TO USE.

The convenient and user-friendly touch slider controls allow you to adjust the cooking zones and the suction level with a simple action.

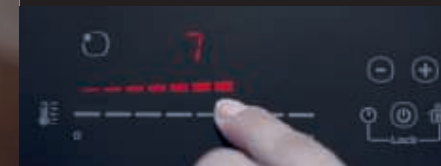

UNLEASH YOUR CREATIVITY.

The cooking zones can be activated in combined mode to use them together with the same level of power, ideal for cooking food in large pots.



EASY TO USE.

The cooktop surface is smooth and seamless allowing dirt to be removed in one simple step.




SPACE SAVING.

In the base cabinet Galileo has a smart drawer where you can easily storage cooking utensils.



MAXIMUM SAFETY IN THE KITCHEN.

Waterproof technology guarantees operation and safety even in the event of liquids spilling onto the cooktop. They do not interfere with the cooking and are collected in a special compartment below.

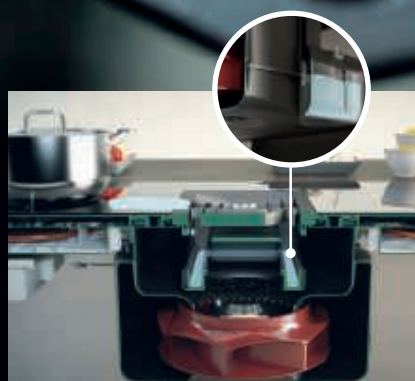


USEFUL

The grease filter is extremely efficient and is also functional because it works as the first barrier and can collect up to 0.5 litres of liquid. It is easily removable and dishwasher-safe.



GALILEO


INSTALLATION KIT



DUCTING KIT SUITABLE FOR ALL GALILEO RANGE*

Ducting kit cod. 112.0540.782


- 1 x flat duct, 200 x 90 x 300 mm
- 2 x vertical 90° bends, 220 x 90 mm
- 1 x flat duct, 200 x 90 x 700 mm
- 1 x duct adapter

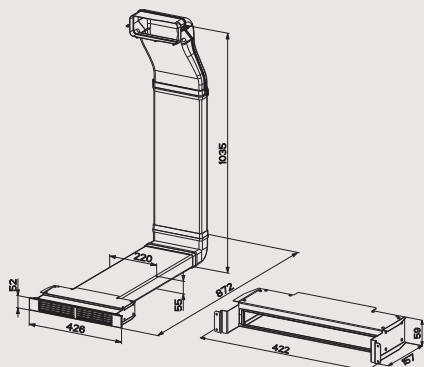

KIT GALILEO 60°

Recycling kit H60 cod. 112.0626.656

- 2 x vertical flanges (rear and front) for connection to the motor
- 1 x flange with seal, 220 x 55 mm
- 2 x flat ducts, 220 x 55 x 60 mm
- 1 x vertical 90° bend, 220 x 55 mm
- Recycling kit H60

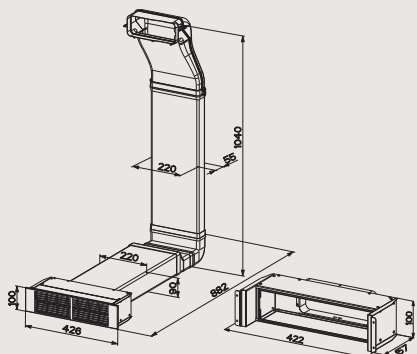



KIT GALILEO 60°

Recycling Kit H100 cod. 112.0626.657

- 2 x vertical flanges (rear and front) for connection to the motor
- 1 x flange with seal, 220 x 55 mm
- 1 flat duct, 220 x 55 x 60 mm
- 1 x vertical 90° bend, 220 x 55 mm
- 1 x flat reducer, 90-55 mm
- 1 x flat duct connector, 200 x 90 mm
- 1 x flat duct, 220 x 90 x 500 mm
- Recycling Kit H100

VENTING HOBS.


To install Galileo venting hobs, you will need to buy the relevant installation kit. Different kits are available, depending on your desired model and configuration, suction or filter. The details of each individual kit, with the components included in the packaging, are outlined below.



KIT GALILEO 80°

Recycling kit H60 cod. 112.0540.730


- 1 x flat duct, 200 x 90 x 300 mm
- 2 x vertical 90° bends, 220 x 90 mm
- 1 x flat duct, 200 x 90 x 700 mm
- 1 x flat reducer, 90-55 mm
- 1 flat duct, 220 x 55 x 60 mm
- Recycling kit H60

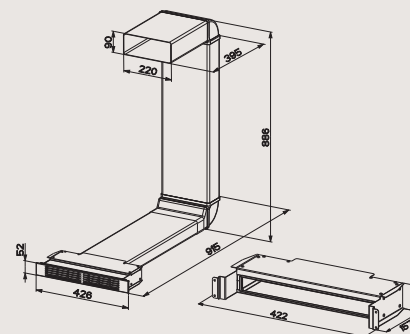

KIT GALILEO 80°

Recycling kit H100 cod. 112.0540.781


- 1 x flat duct, 200 x 90 x 300 mm
- 2 x vertical 90° bends, 220 x 90 mm
- 2 x flat ducts, 200 x 90 x 700 mm
- Recycling kit H100

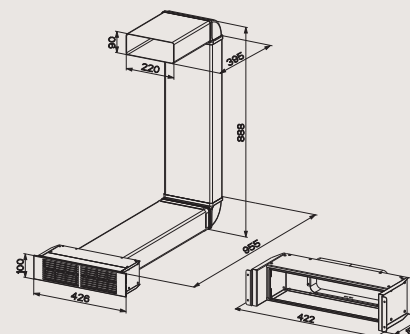

KIT GALILEO 80°

Long lasting Recycling Kit H80 cod. 112.0605.735

- 1 x flat duct, 200 x 90 x 300 mm
- 2 x vertical 90° bends, 220 x 90 mm
- 1 x flat duct, 200 x 90 x 700 mm
- 1 x flat reducer, 90-55 mm
- 1 flat duct, 220 x 55 x 60 mm
- LL H80 kit

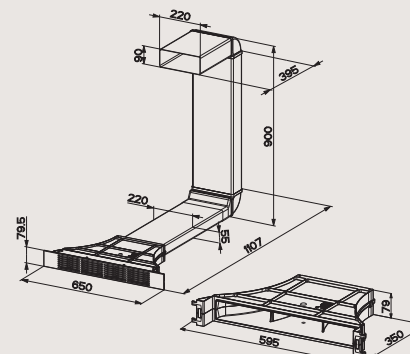


More information in the instruction manual on www.faberspa.com

GALILEO


AIR-DUCT SYSTEM OR EQUIVALENT

FLAT DUCT TR 1500 220X55X1500 MM cod. 112.0157.294


- Galileo 60 H
- Galileo Smart 60 H



ROUND TO RECTANGULAR ADAPTER cod. 112.0157.296




VERTICAL 90° ELBOW BEND cod. 112.0157.298




HORIZONTAL 90° BEND cod. 112.0157.300


- Galileo 60H
- Galileo Smart 60H (lateral outlet)




RECTANGULAR LOUVRED GRILLE cod. 112.0157.304




HORIZONTAL 90° ELBOW BEND cod. 112.0157.306




ROUND PIPE TC 1000 cod. 112.0157.308




FLAT DUCT CONNECTOR cod. 112.0157.295




WALL CONNECTOR cod. 112.0157.297




VERTICAL 90° BEND cod. 112.0157.299




RECTANGULAR REDUCTION FITTING 60 MM cod. 112.0557.017




ROUND LOUVRED GRILLE Ø 125 MM cod. 112.0157.303




BRACKET cod. 112.0157.305




RIGHT ANGLE BEND 90° Ø 125 MM cod. 112.0157.307




FLANGE cod. 112.0157.309




FLAT DUCT TR 1200 220X90 MM cod. 112.0459.427




ROUND TO RECTANGULAR ADAPTER 220X90 MM cod. 112.0459.429




VERTICAL 90° BEND 220X90 MM cod. 112.0459.453




BRACKET 220X90 MM cod. 112.0459.456




FLEXIBLE CONNECTOR RF 600 cod. 112.0280.685




RIGHT ANGLE BEND 90° Ø 150 MM cod. 112.0253.688




FLAT DUCT CONNECTOR 220X90 MM cod. 112.0459.428




90° ELBOW BEND 220X90 MM cod. 112.0459.451




HORIZONTAL 90° BEND 220X90 MM cod. 112.0459.455




ROUND PIPE TC 1000 Ø 150 MM cod. 112.0253.681



ROUND CONNECTOR Ø 150 MM cod. 112.0253.690



PIPE GRID 220X90 cod. 112.0605.516



NOTE: Minimum order 10 pieces per code (or multiples of 10)

GALILEO

GALILEO BK GLASS NG A830 cod. 340.0594.624



Discover the product video
on our YouTube channel



FEATURES HOOD	PERFORMANCE HOOD						
Finish • Black glass / Cast iron grid	Speed	1	2	3	8	INT	BOOST
Controls Touch slider	Air capacity IEC point	245	285	350	505	550	700
Grease filter Cassettes dishwasher safe	Pressure	290	370	525	550	555	560
Ø of air outlet 220x90 mm	Input	35	45	65	130	140	220
Energy class A+++	Noise level	51	55	57	65	66	72
Suction speed 6.6 m/s							




FEATURES INDUCTION HOB	FUNCTIONS INDUCTION HOB	
Finish • Black glass	Bridge zones	2
Product dimensions LxW (mm) 830x520	Power setting (stages)	9
Induction zone 4 2100-3700 W singola 4200-7400 W in ponte	Timer min-max	1-59 min.
Induction zone dimensions (mm) 230x210 single 460x210 bridge	Booster (P)	Yes
Controls Touch slider	Auto switch off	Yes
Power (W) 7400	Over temperature protection	Yes
Voltage (V) 220-240	Over current or voltage abnormality protection	Yes
Frequency (HZ) 50/60	Container detection system	Yes
	Automatic shutdown protection	Yes
	Power On indicator	Yes
	Childlock	Yes







GALILEO CAN FIT IN 60/70 CM DEEP WORKTOP

STANDARD INSTALLATION



FLUSH FIT INSTALLATION

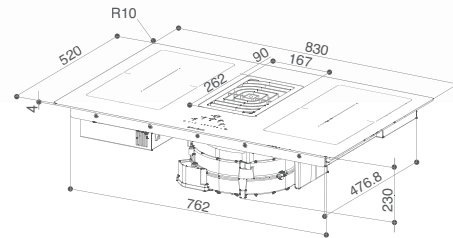

ABBINARE SEMPRE AL PIANO ASPIRANTE 1 DEI 3 KIT DI INSTALLAZIONE:

Ducting cod.112.0540.782



Rear ducting version installation



Lateral ducting version installation

Recycling

cod. 112.0540.730 60 - 80 mm height skirting board
cod. 112.0540.781 100 mm height skirting board



Front recycling version installation 60H and H100

