

GALILEO GLASS







ASPIRATION HOB






GALILEO CAN FIT IN 60/70 CM DEEP WORKTOP

STANDARD INSTALLATION

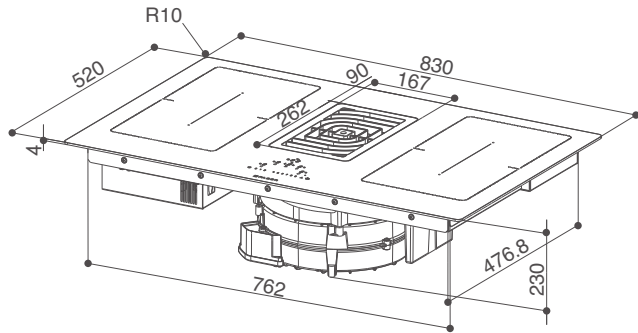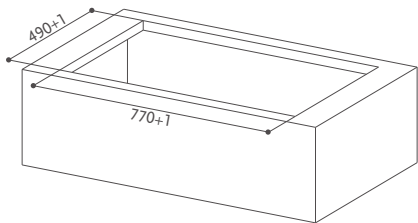

FLUSH FIT INSTALLATION

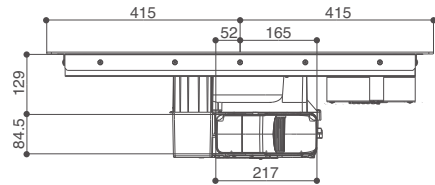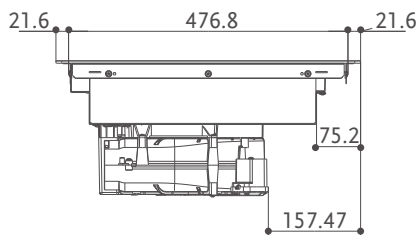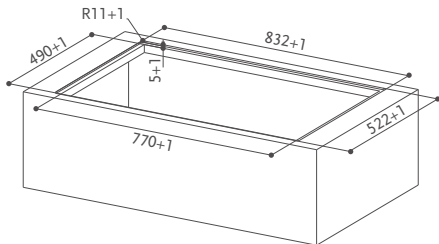


ALWAYS COMBINE TO HOB EXTRACTOR 1 OF THE 3 INSTALLATION KIT:

Ducting

cod.112.0540.782



Rear ducting version installation



Lateral ducting version installation

Recycling

cod. 112.0540.730 60 - 80 mm height skirting board
cod. 112.0540.781 100 mm height skirting board
cod. 112.0685.046 Rear filtering kit



Front recycling version installation 60H and H100

GALILEO GLASS

GALILEO HE BK GLASS NG A83 cod. 340.0679.890



FEATURES HOOD	PERFORMANCE HOOD						
Finish • Black matt glass / Design glass grid	Speed	1	2	3	8	INT	BOOST
Controls Touch slider	Air capacity IEC point	230	270	320	470	510	620
Grease filter Cassettes dishwasher safe	Pressure	300	430	620	650	660	650
Ø of air outlet 220x90 mm	Input	50	30	60	130	170	220
Energy class A+	Noise level	51	56	60	67	69	73
Suction speed 6.6 m/s							



FEATURES INDUCTION HOB	FUNCTIONS INDUCTION HOB	
Finish • Black glass	Bridge zones	2
Product dimensions LxW (mm) 830x520	Power setting (stages)	9
Induction zone 4 2100-3700 W single 4200-7400 W in Bridge mode	Timer min-max	1-59 min.
Induction zone dimensions (mm) 230x210 single 460x210 in Bridge mode	Booster (P)	Yes
Controls Touch slider	Auto switch off	Yes
Power (W) 7400	Over temperature protection	Yes
Voltage (V) 220-240	Over current or voltage abnormality protection	Yes
Frequency (HZ) 50/60	Container detection system	Yes
	Automatic shutdown protection	Yes
	Power On indicator	Yes
	Childlook	Yes

ASPIRATION HOB